

FIG. 1

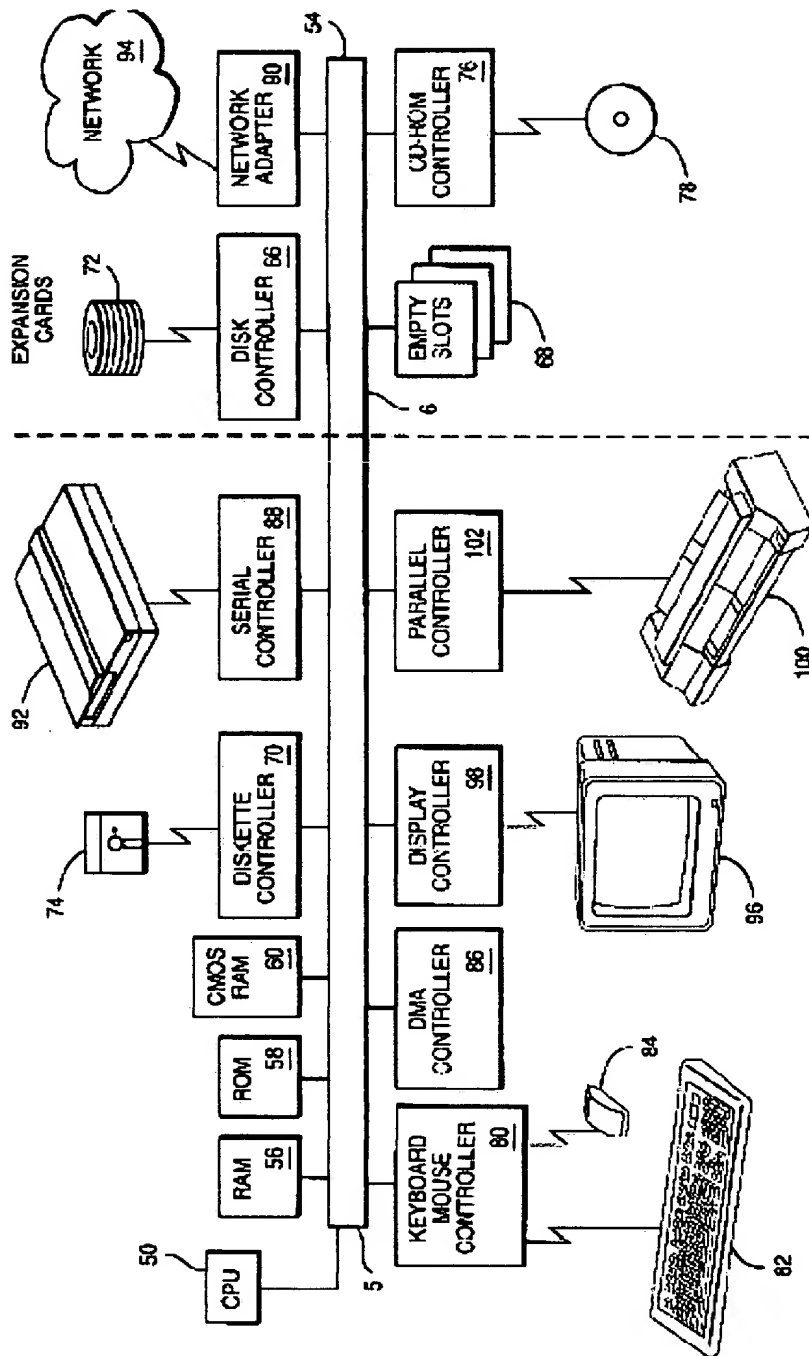


FIG. 2

2/10 IBM
Docket No.
AUS9-2000-
0697-US1

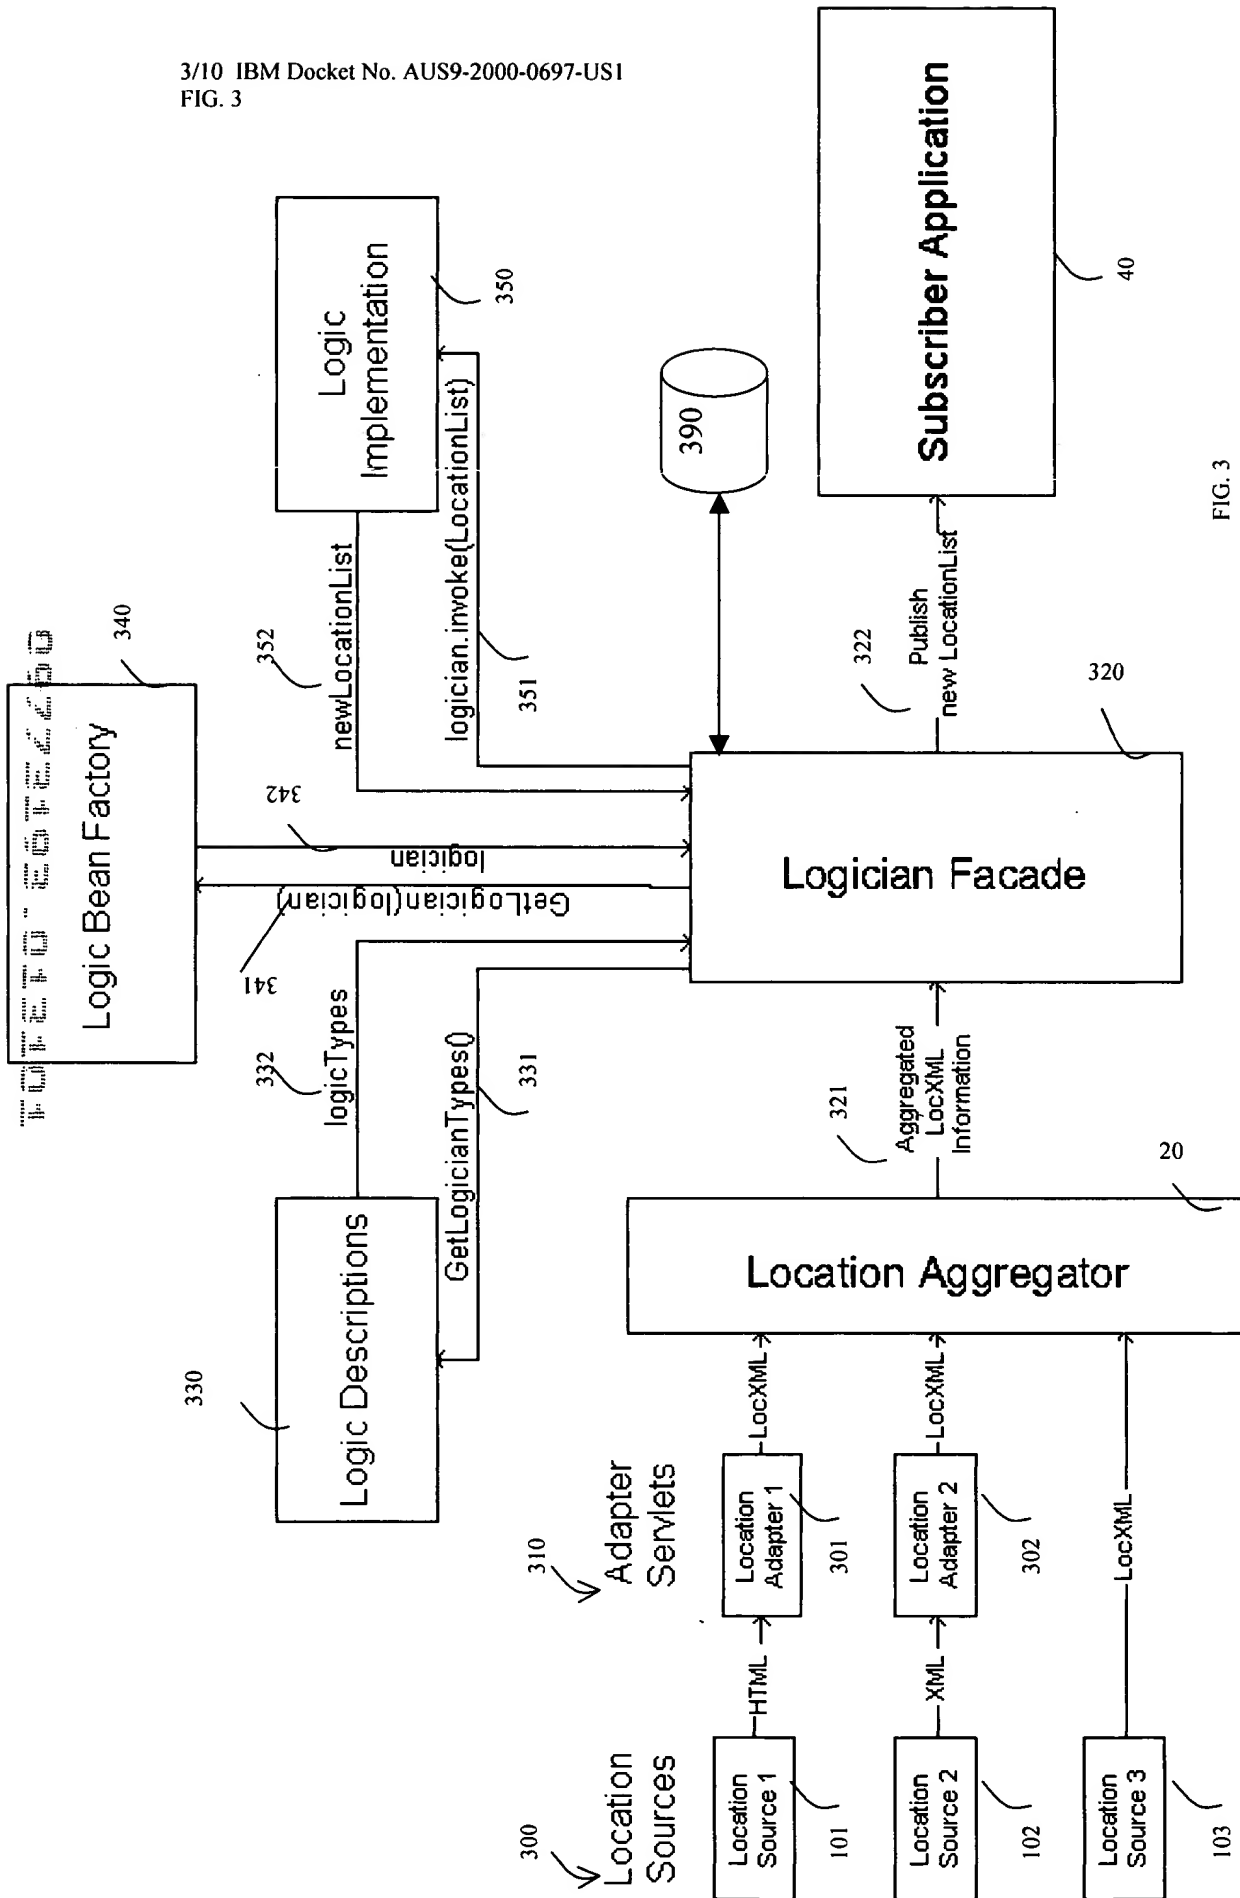


FIG. 3

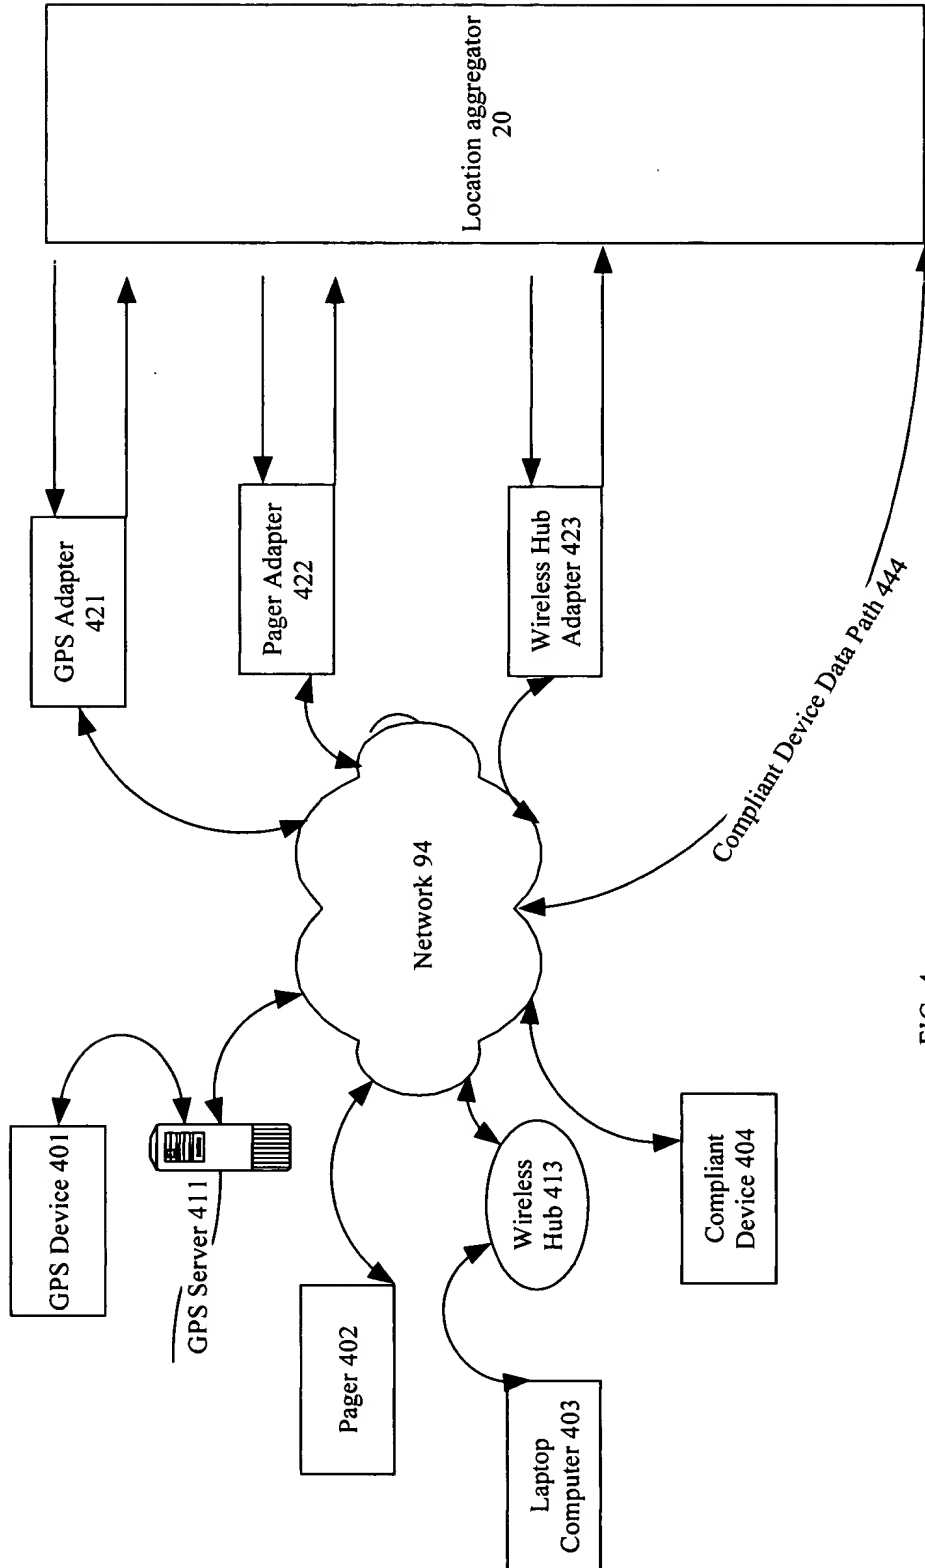


FIG. 4

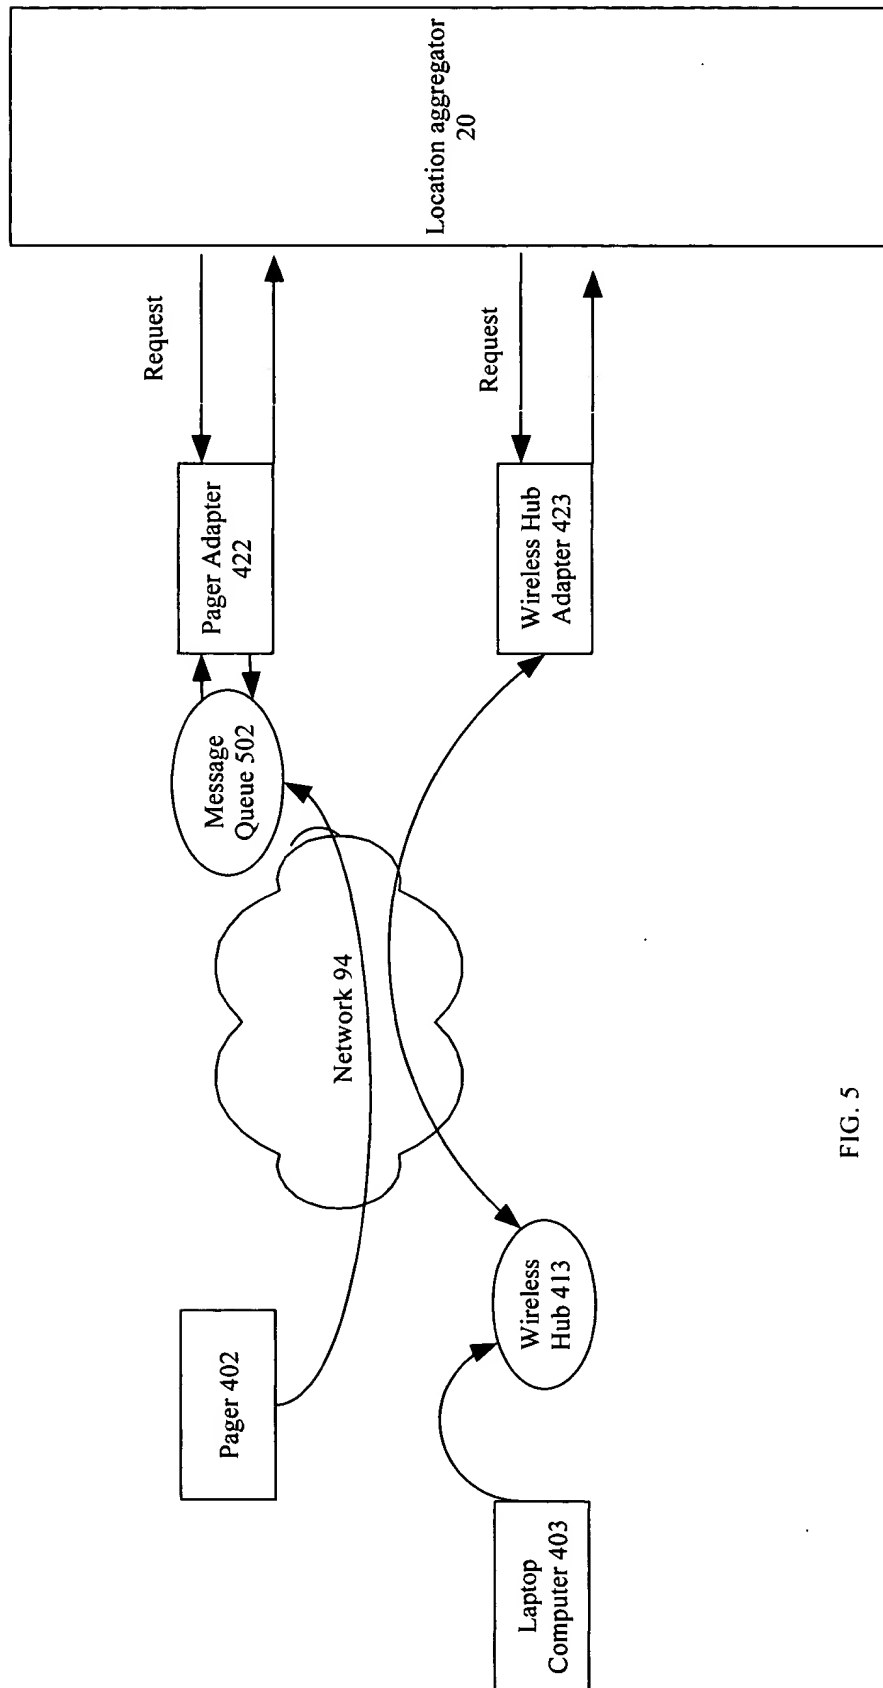


FIG. 5

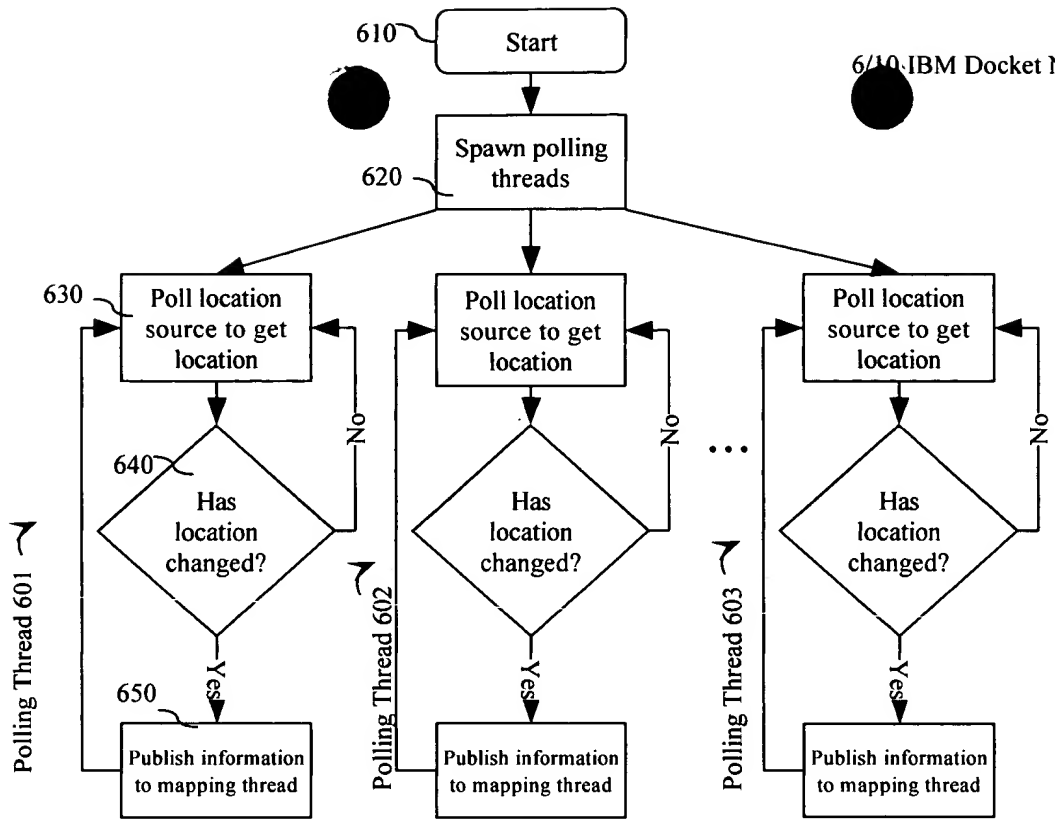


FIG. 6

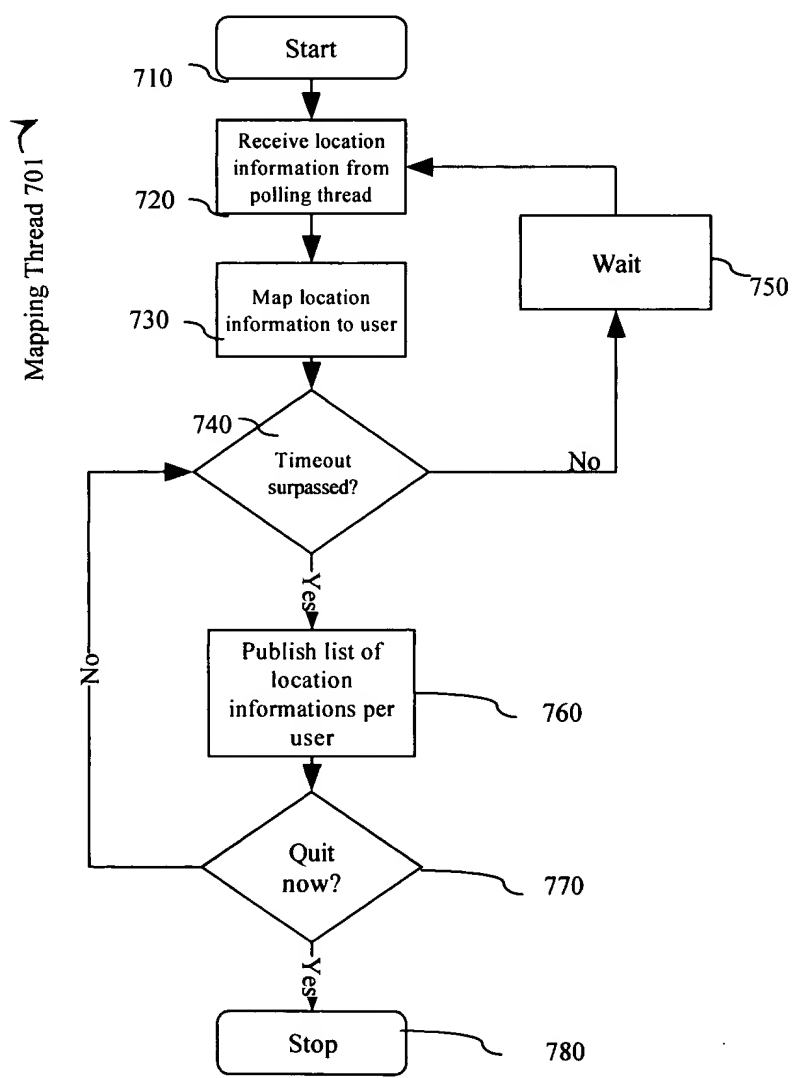


FIG. 7

811

```
-<LocationInformation>
-  <MobileDevice TrackID="1234567890" RequestTime="20000626115751+-0800" ErrorCode="0">
-    <Geographic Velocity="0" PositionTime="20000626115751+-0800">
832
-      <GeodeticDatum>
-        <-<WGS-84>
-          <LatLong PositionFormat="IDMS0" Latitude="N374820" Longitude="W1222738"/>
833
-        </WGS-84>
-      </GeodeticDatum>
-      <HeightDatum HeightFormat="meters" HeightValue="500"/>
-      <Region RadiusFormat="meters" InnerRadius="0" OuterRadius="100" StartAngle="0" StopAngle="360"
LevelOfConfidence="100"/>
-    </Geographic>
-  <TowerID PositionTime="20000626115751+-0800" Name="95110" Type="ZIP"/>
-  </MobileDevice>
-</LocationInformation>
```

871 872

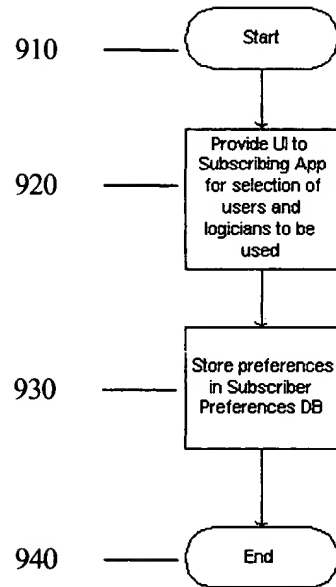


FIG. 9


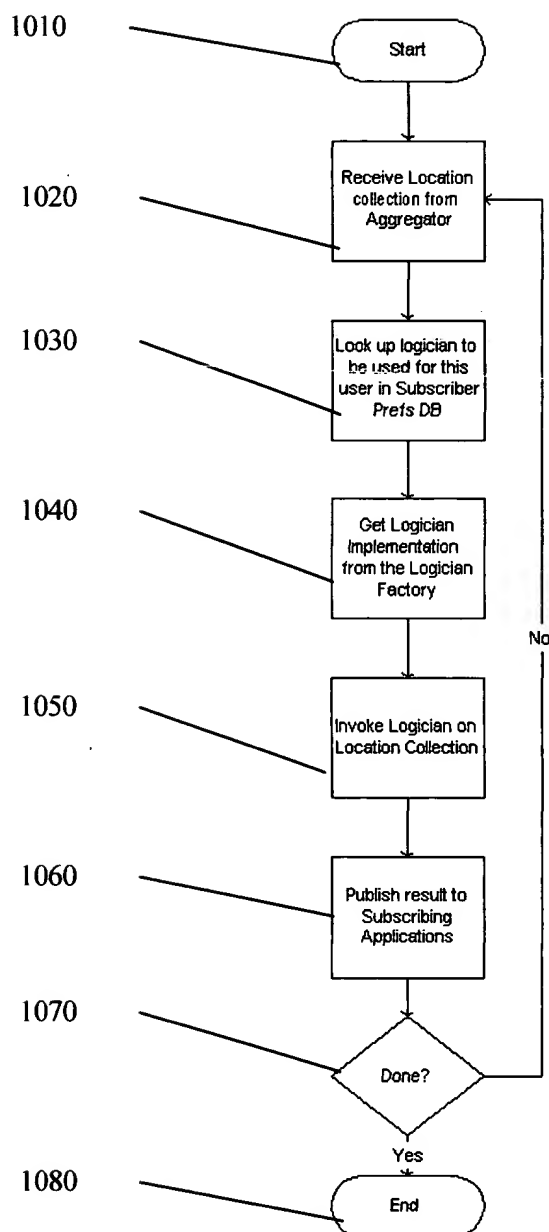


FIG. 10

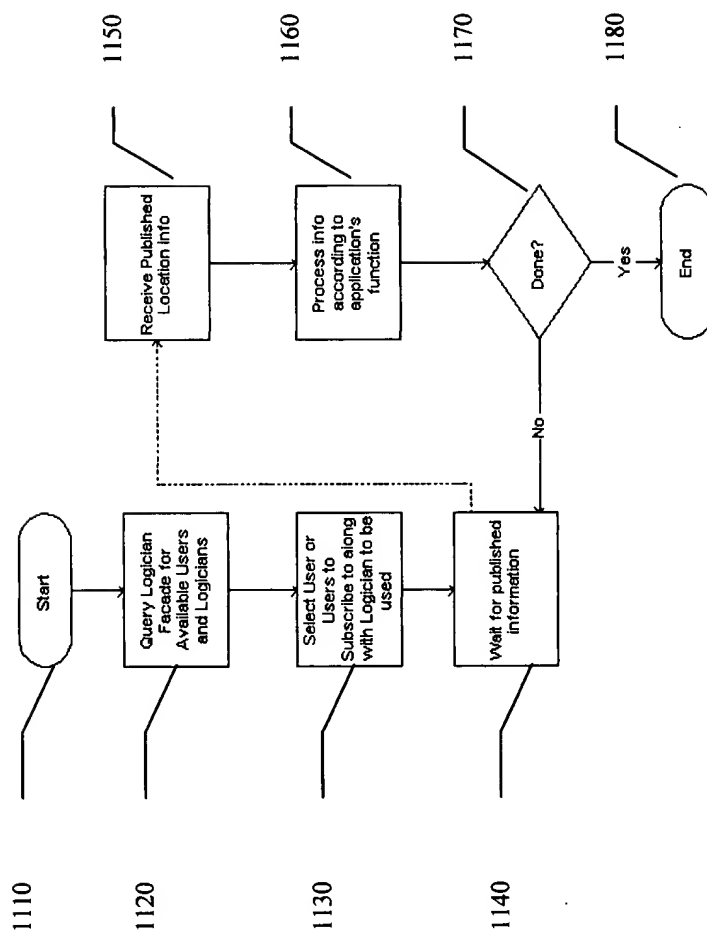

10/10 IBM Docket
No. AUS9 -2000-
0697-US1

FIG. 11